

Ldge - Lit LED Exit Sign



LED Exit Sign Box








Exit Sign

Legend










J

ズ

x

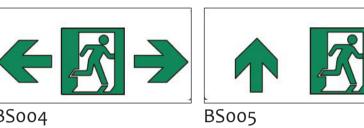

BS004



BS007





BSoo9

BS006

We can provide special made EXIT sign panels and other signs upon customer required.











BS016

BS013

BS017









EU004







EU007

EUoo8





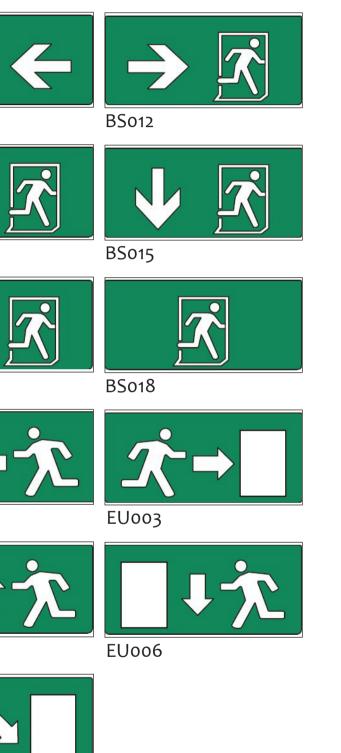





Edge - Lit LED Exit Sign

Model: CS


SPECIFICATION		
Model No.	CS	
Installation Mode	Top / Back / Side	
Words Display	Single / Double Side Luminescence	
Light Source	12 pieces high intensity SMD2835 GREEN LEDs	
Housing	Aluminum alloy materials	
Input Voltage	AC 180V–242V, 50Hz	
Rechargeable Battery	NiCd 4.8V 800mAh	
Total Power Consumption	≤ 3W	
Charging Time	≤ 12 hours	
Battery Power-on Time	≥3 Hours	
Protection Rating	IP20	
System Mode	Maintained	
Operation Temperature	0°C~50°C	
LED Operating Life	≥50000 Hours	
Battery Charge and Discharge Life Span	Approx. 4 year	
Outside Features	"Green" power indication light & "Test" switch	
Test Button	Press type	
Charge Indicator	Green LED	
Testing Standard	HKFSD Codes of Practice for minimum service installations and equipments (April 2012) Clause 5.10 Exit Sign BS EN 60598-2-22:2008, BS 5266-1:2012, BS 5499-3:1990	
Weight	Case Box: 0.90kg, Plate: 0.85kg, Total: 1.75kg	



DIMENSION (mm) OVE	RALL VIS
slite	
Model US	0



Edge Lit LED Exit Sign

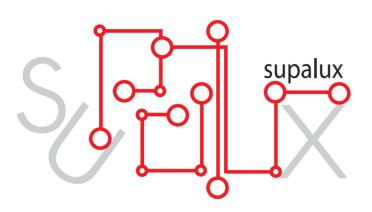

Web Site http:www.sl-led-application.com

E-mail info@sl-led-application.com

Tel 852 – 2370 9394

Fax 852 – 2743 1123

Address

Unit 202A, 20/F.,Tak King Industrial Building, 27 Cheung Lee Street, Chai Wan, Hong Kong.

Editor

Au Pui Man (openopw@gmail.com)