

Ldge - Lit LED Exit Sign




LED Exit Sign Box




Exit Sign

Legend

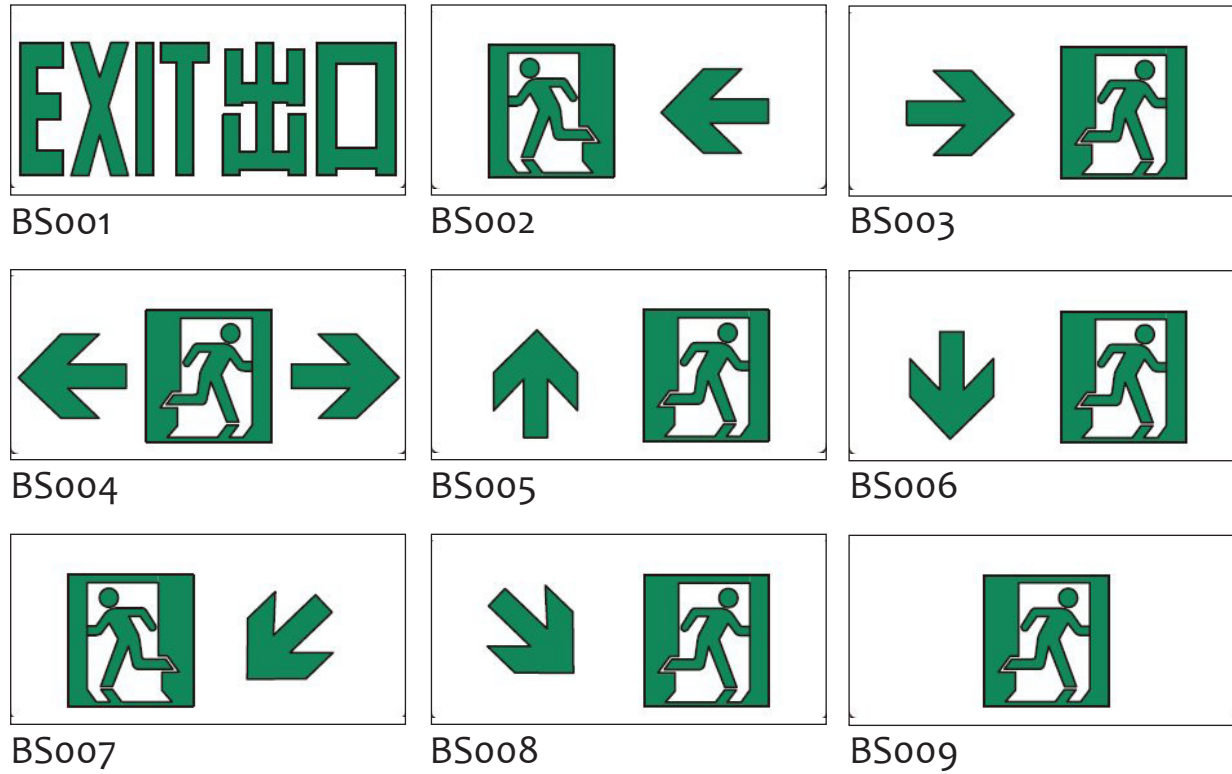

We can provide special made EXIT sign panels and other signs upon customer required.

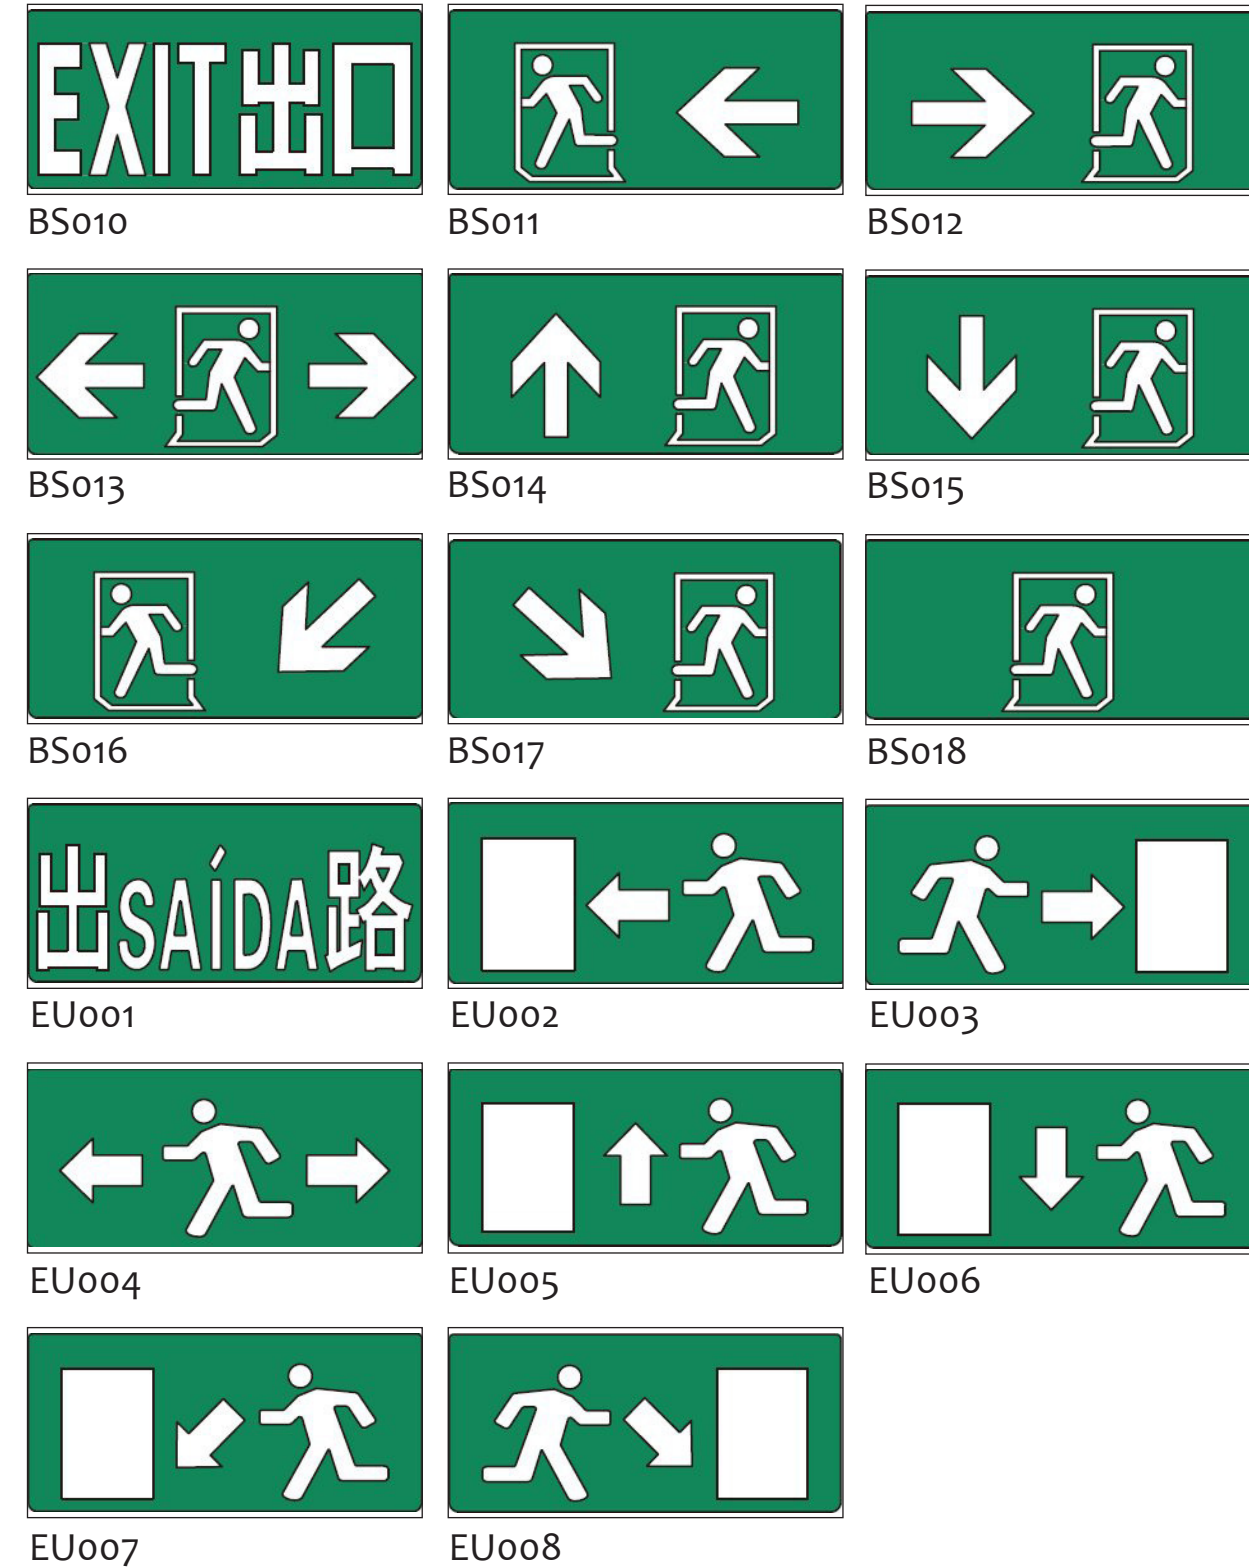



Edge Lit LED Exit Sign

Model: CS/G-R


SPECIFICATION

Model No.	CS/G-R
Installation Mode	Top
Words Display	Single / Double Side Luminescence
Light Source	12 pieces high intensity SMD2835 WHITE LEDs
Housing	Powder-coated Mild Steel
Input Voltage	AC 180V-242V, 50Hz
Rechargeable Battery	NiCd 4.8V 800mAh
Total Power Consumption	≤ 3.8W
Charging Time	≤ 12 hours
Battery Power-on Time	≥ 2 hours
Protection Rating	IP20
System Mode	Maintained Type
Operation Temperature	0°C~50°C
LED Operating Life	≥50000 Hours
Battery Charge and Discharge Life Span	Approx. 4 year
Outside Features	"Green" power indication light & "Test" switch
Test Button	Press type
Charge Indicator	Green LED
Testing Standard	HKFSD Codes of Practice for minimum service installations and equipments (April 2012) Clause 5.10 Exit Sign BS EN 60598-2-22:2008, BS 5266-1:2012, BS 5499-3:1990



DIMENSION (mm) OVERALL VISIBLE PART: L415 x H243.30 x W86 mm



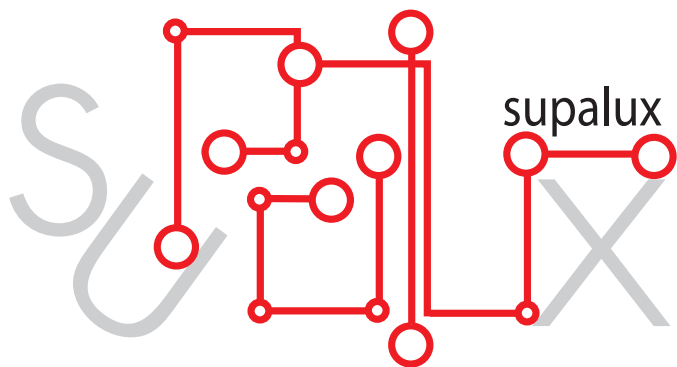

Web Site

<http://www.sl-led-application.com>

E-mail

info@sl-led-application.com

Tel

852 – 2370 9394

Fax

852 – 2743 1123

Address

Unit 202A, 20/F., Tak King Industrial Building,
27 Cheung Lee Street, Chai Wan, Hong Kong.

Editor

Au Pui Man
(openopw@gmail.com)