

## Ldge - Lit LED Exit Sign




## LED Exit Sign Box




# Exit Sign

## Legend

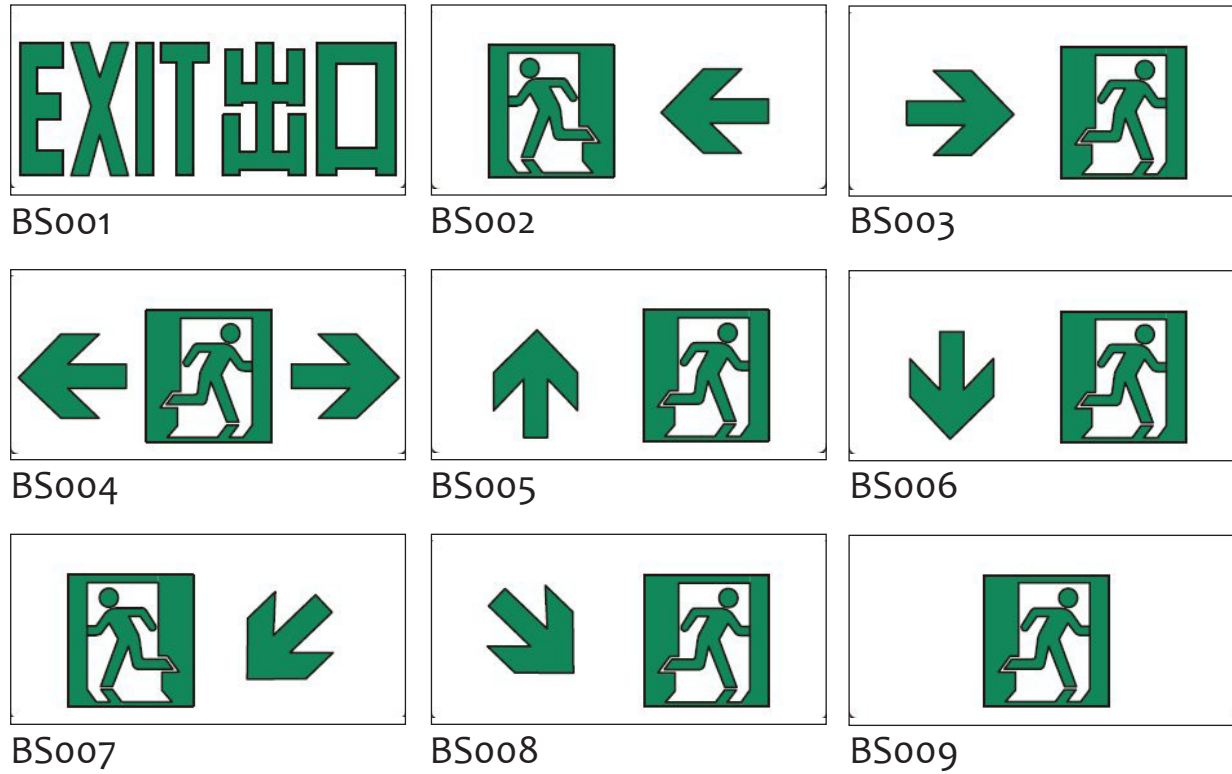

We can provide special made EXIT sign panels and other signs upon customer required.

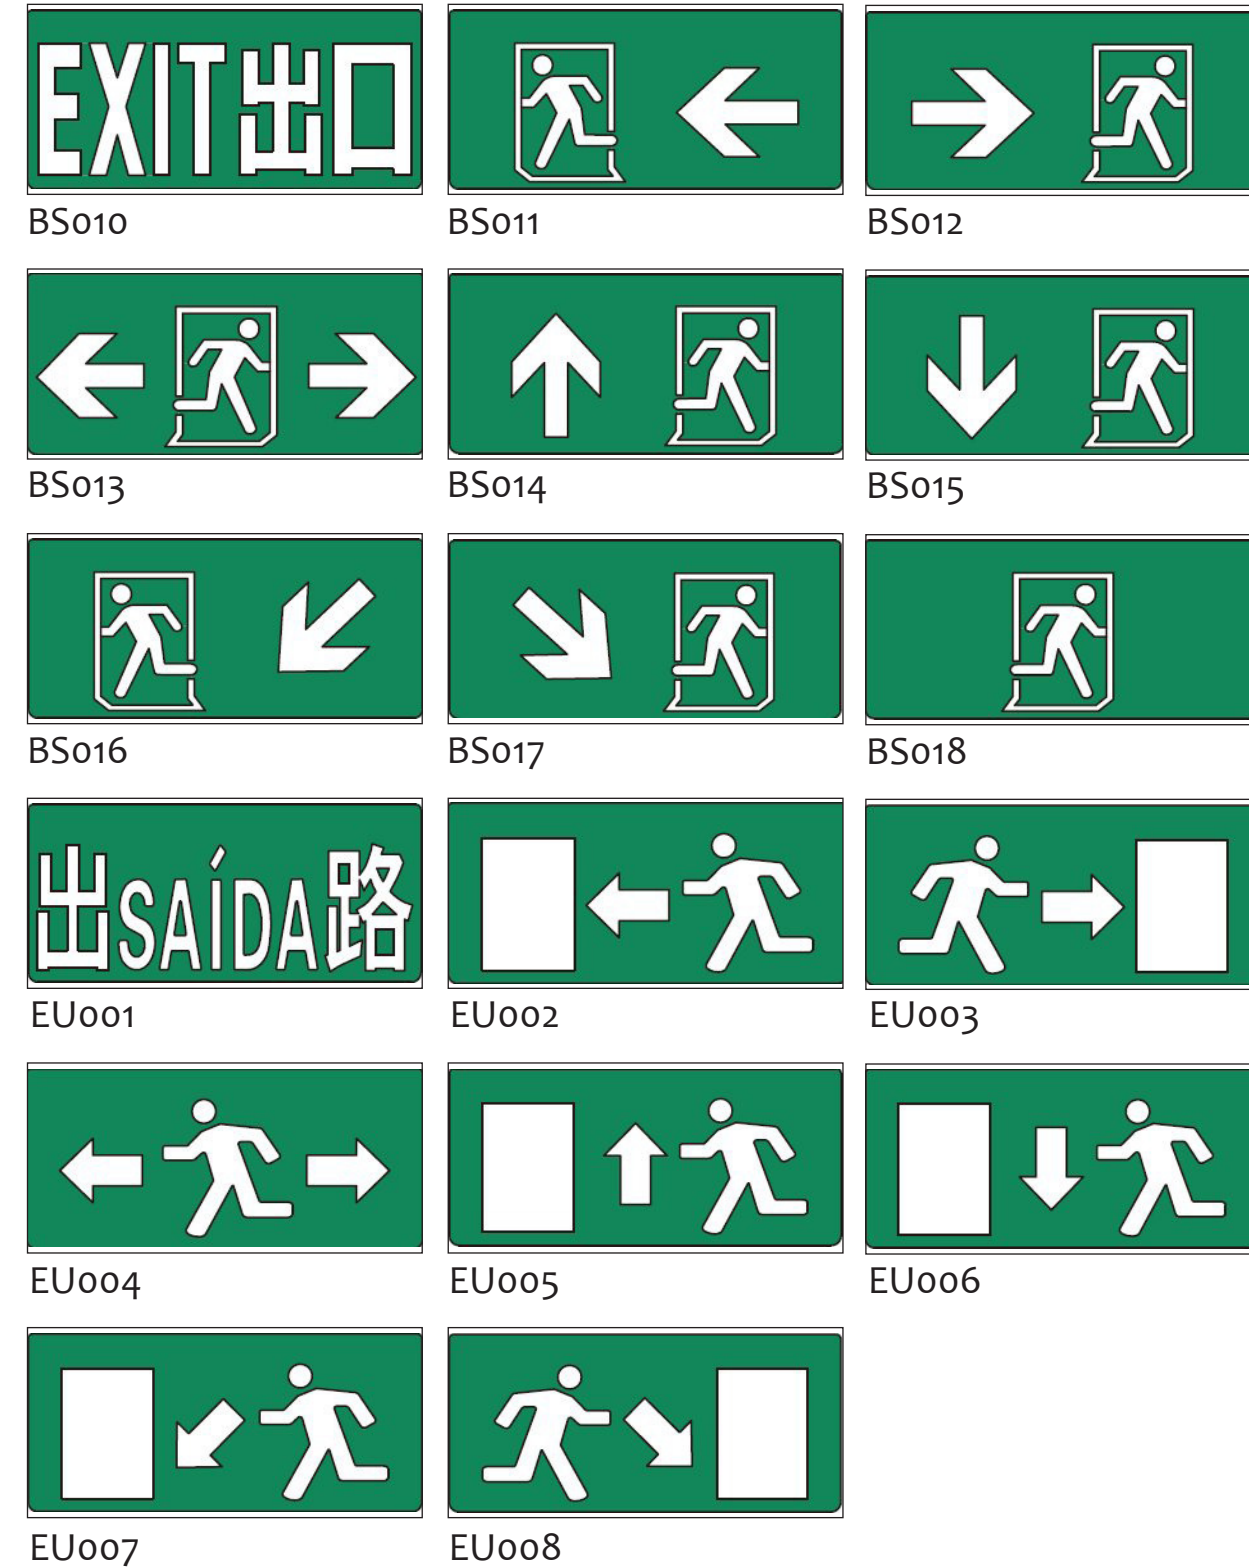




# Edge Lit LED Exit Sign

## Monthly Self-Test Function

Model: DS/W-TR



DIMENSION (mm) OVERALL VISIBLE PART: L415 x H243.3 x W86 mm

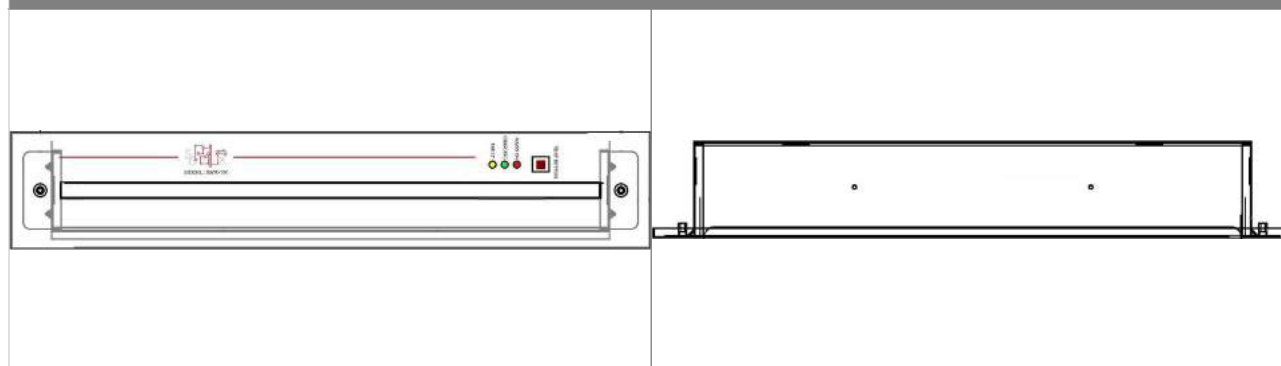


### SPECIFICATION

Model No.	<b>DS/W-TR</b>
Installation Mode	Recessed
Words Display	Single / Double Side Luminescence
Light Source	12 pieces high intensity WHITE LEDs
Housing	Powder-coated Mild Steel
Input Voltage	AC 180V-242V, 50Hz
Rechargeable Battery	Ni-MH 4.8V 1800mAh
Power Consumption	Normal: 3W, Charging Stage: 4.2W
Charging Time	≤ 12 hours
Battery Power-on Time	≥ 3 Hours
Protection Rating	IP20
System Mode	Maintained Type
Operation Temperature	0°C~50°C
LED Operating Life	≥50000 Hours
Battery Charge and Discharge Life Span	Approx. 4 year
LED Indicators	<ul style="list-style-type: none"> <li>“Green” LED “Flashing” Charging</li> <li>“Green” LED “ON” Fully Charge</li> <li>“Yellow” LED “Flashing” Battery / Lamp Fault</li> <li>“Red , Green , Yellow” LED “ON” Self-test Fault</li> <li>“Red” LED “ON” Main</li> <li>“Red” LED “Flashing” indicating self-testing</li> </ul>
Test Button	Press type
Self-Test Function	<ul style="list-style-type: none"> <li>• System timer will start to count once the mains power is connected.</li> <li>• Self-Testing will work automatically on every 30 Days.</li> <li>• RED LED indicator will be flashing during self-testing.</li> <li>• Time schedule for the battery discharging is follow FSD PPA 104(A) 4th Revision as below: - Monthly: Not exceeding one quarter of rated duration</li> </ul>
Weight	Case Box:0.90kg, Plate:0.85kg, Total: 1.75kg
Testing Standard	<p><b>HKFSD Codes of Practice for minimum service installations and equipments (April 2012) Clause 5.10 Exit Sign</b></p> <p>BS EN 60598-2-22:2008, BS 5266-1:2012, BS 5499-3:1990</p>

Edge Lit LED Exit Sign

Edge Lit LED Exit Sign

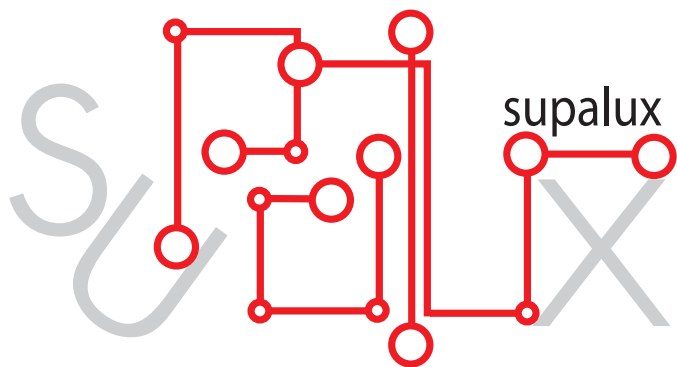

**Web Site**

<http://www.sl-led-application.com>

**E-mail**

[info@sl-led-application.com](mailto:info@sl-led-application.com)

**Tel**

852 – 2370 9394

**Fax**

852 – 2743 1123

**Address**

Unit 202A, 20/F., Tak King Industrial Building,  
27 Cheung Lee Street, Chai Wan, Hong Kong.

**Editor**

Au Pui Man  
([openopw@gmail.com](mailto:openopw@gmail.com))