

Ldge - Lit LED Exit Sign



LED Exit Sign Box













Exit Sign


Legend

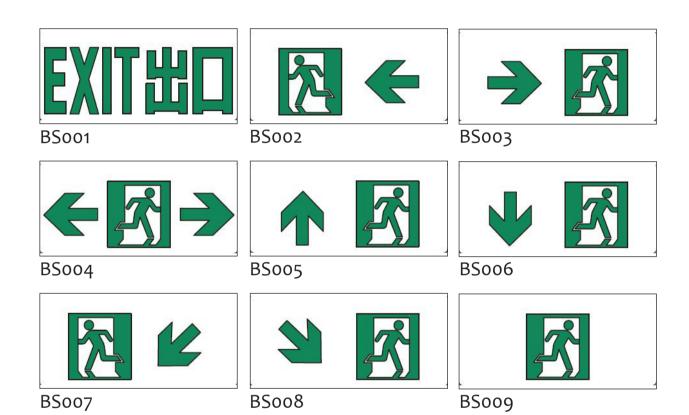

We can provide special made EXIT sign panels and other signs upon customer required.

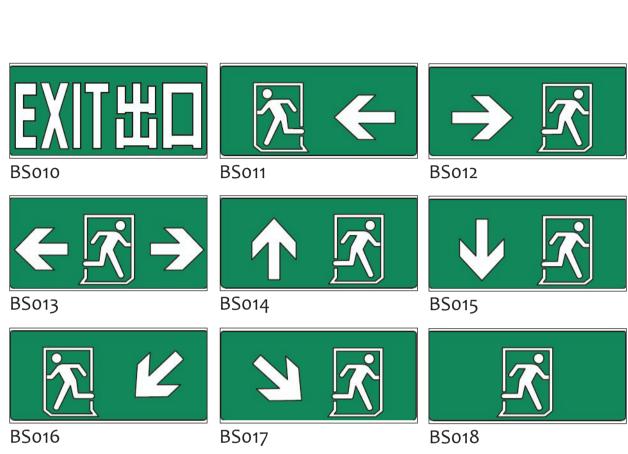



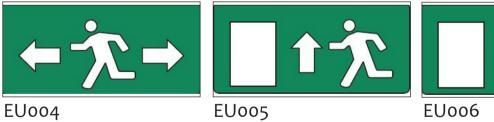








Edge Lit LED Exit Sign


Model: DS/W

ODEO	IFICATION
SPECIFICATION	
Model No.	DS/W
Installation Mode	Top / Back / Side
Words Display	Single / Double Side Luminescence
Light Source	12 pieces high intensity WHITE LEDs
Housing	Aluminum alloy materials
Input Voltage	AC 180V-242V, 50Hz
Rechargeable Battery	Ni-MH 4.8V 1800mAh
Power Consumption	Normal: 3W, Charging Stage: 4.2W
Charging Time	≤ 12 hours
Battery Power-on Time	≥ & Hours
Protection Rating	IP20
System Mode	Maintained
Operation Temperature	0°C∼50°C
LED Operating Life	≥ 5 0000 Hours
Battery Charge and Discharge Life Span	Approx. 4 year
Outside Features	"Red" Charging indication light, "Yellow" Fault indication light, "Green" Charged indication light with flashing indicating self-test
Test Button	Press type
Testing Standard	HKFSD Codes of Practice for minimum service installations and equipments (April 2012) Clause 5.10 Exit Sign BS EN 60598-2-22:2008, BS 5266-1:2012, BS 5499-3:1990
Weight	Case Box:0.90kg, Plate:0.85kg, Total: 1.75kg

Edge Lit LED Exit Sign



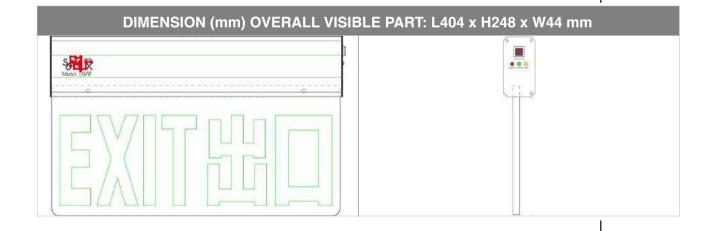

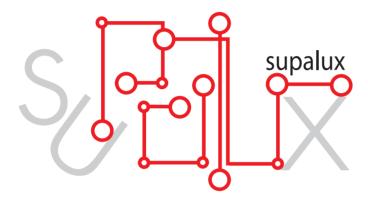

Web Site

http:www.sl-led-application.com

E-mail

info@sl-led-application.com

Tel

852 – 2370 9394

Fax

852 - 2743 1123

Address

Unit 202A, 20/F., Tak King Industrial Building, 27 Cheung Lee Street, Chai Wan, Hong Kong.

Editor

Au Pui Man (openopw@gmail.com)