

Ldge - Lit LED Exit Sign



LED Exit Sign Box













Exit Sign


Legend

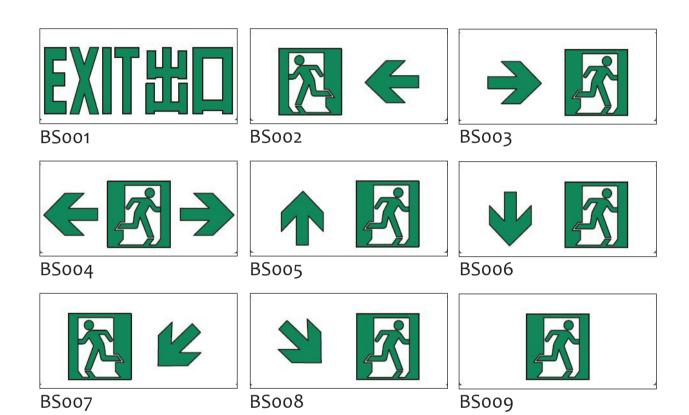

We can provide special made EXIT sign panels and other signs upon customer required.

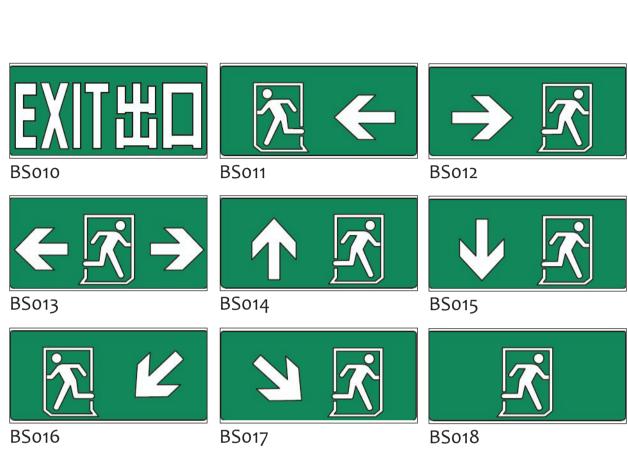



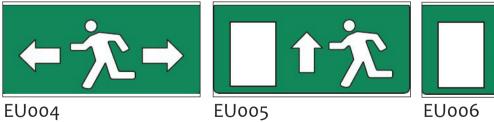








Edge Lit LED Exit Sign

Monthly Self-Test Function


Model: DS/W-T



Edge Lit LED Exit Sign

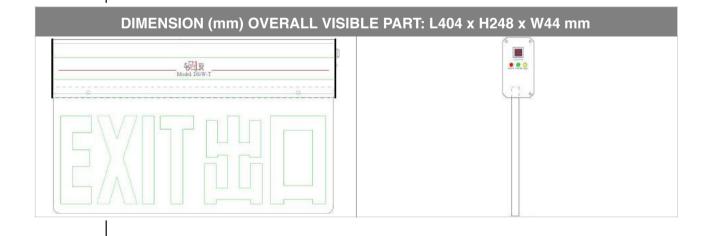

SPECIFICATION	
Model No.	DS/W-T
Installation Mode	Top / Back / Side
Words Display	Single / Double Side Luminescence
Light Source	12 pieces high intensity WHITE LEDs
Housing	Aluminium alloy materials
Input Voltage	AC 180V-242V, 50Hz
Rechargeable Battery	Ni-MH 4.8V 1800mAh
Power Consumption	Normal: 3W, Charging Stage: 4.2W
Charging Time	≤ 12 hours
Battery Power-on Time	≥3 Hours
Protection Rating	IP20
System Mode	Maintained Type
Operation Temperature	0°C∼50°C
LED Operating Life	≥50000 Hours
Battery Charge and Discharge Life Span	Approx. 4 year
LED Indicators	"Green" LED " Flashing" Charging "Green" LED "ON" Fully Charge "Yellow" LED" Flashing" Battery / Lamp Fault "Red , Green ,Yellow" LED"ON" Self-test Fault "Red" LED "ON" Main "Red" LED" Flashing indicating self-testing
Test Button	Press type
Self-Test Function	 System timer will start to count once the mains power is connected. Self-Testing will work automatically on every 30 Days. RED LED indicator will be flashing during self-testing. Time schedule for the battery discharging is follow FSD PPA 104(A) 4th Revision as below: - Monthly: Not exceeding one quarter of rated duration
Testing Standard	HKFSD Codes of Practice for minimum service installations and equipments (April 2012) Clause 5.10 Exit Sign BS EN 60598-2-22:2008, BS 5266-1:2012, BS 5499-3:1990
Weight	Case Box:0.90kg, Plate:0.85kg, Total: 1.75kg

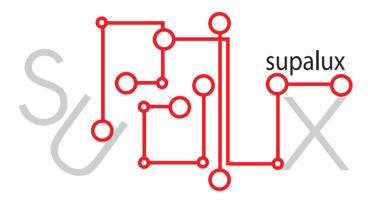

Web Site

http:www.sl-led-application.com

E-mail

info@sl-led-application.com

Tel

852 – 2370 9394

Fax

852 - 2743 1123

Address

Unit 202A, 20/F., Tak King Industrial Building, 27 Cheung Lee Street, Chai Wan, Hong Kong.

Editor

Au Pui Man (openopw@gmail.com)