

LED Emergency Luminaries



LED Twin Spot Surface Mount Emergency Light


Slim Surface Mount Model: **SLEL-01**


Monthly Self-Test Function

SPECIFICATION	
Model No.	SLEL-01
Luminaries Type	Non-Maintained Type
Light Source	2 x 3W High Quality LED chips
Housing	Powder-coated Mild Steel
Input Voltage	AC 180V-242V, 50Hz
Rechargeable Battery	NiMH 12V 1800mAh
Total Power Consumption	6W
Battery Recharge Duration	≤ 12 hours / 24 hours
Emergency Duration	≥ 2 hours / 3 Hours
Insulation Class	Class one Earthing
Operation Temperature	0°C~50°C
LED Operating Life	≥ 50000 Hours
Battery Charge and Discharge Life Span	Approx. 4 year
Outside Features	"Red" "Yellow" "Green" indication light & "Test" switch
Test Button	Press type
LED Indicators	"Green" LED "Flashing" Charging "Green" LED "ON" Fully Charge "Yellow" LED "Flashing" Battery / Lamp Fault "Red , Green ,Yellow" LED"ON" Self-test Fault "Red" LED "ON" Main "Red" LED "Flashing" indicating self-testing
Self-Test Function	<ul style="list-style-type: none"> • System timer will start to count once the mains power is connected. • Self-Testing will work automatically on every 30 Days. • RED LED indicator will be flashing during self-testing. • Time schedule for the battery discharging is follow FSD PPA 104(A) 4th Revision as below: - Monthly: Not exceeding one quarter of rated duration
Testing Standard	HKFSD Codes of Practice for minimum service installations and equipments *FSD PPA 104(A) (4th Revision) *BSEN 60598-2-22:2008, *BS 5266-1:2012



DIMENSION (mm) BOX : L266.3 x H161.5 x W46 mm, LIGHT HEAD: D100 mm

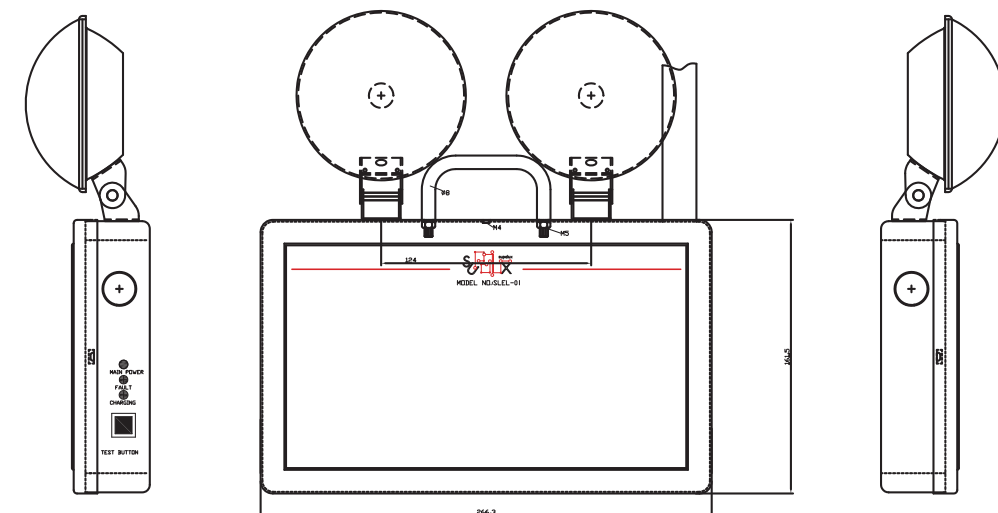

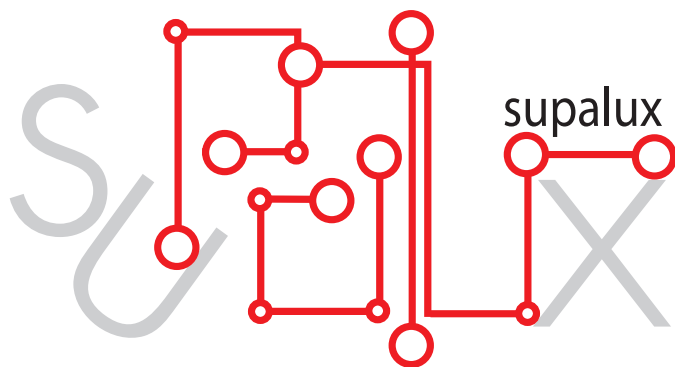

Web Site

<http://www.sl-led-application.com>

E-mail

info@sl-led-application.com

Tel

852 – 2370 9394

Fax

852 – 2743 1123

Address

Unit 202A, 20/F., Tak King Industrial Building,
27 Cheung Lee Street, Chai Wan, Hong Kong.

Editor

Au Pui Man
(openopw@gmail.com)