

LED Emergency Luminaries






LED Twin Spot Recess Mount Emergency Light

Surface / Recess Mount Model: **SLEL-05-A**


Monthly Self-Test Function



COVER DIMENSION: L360 x W170 mm, BOX DIMENSION: L322 x H63 x W141 mm

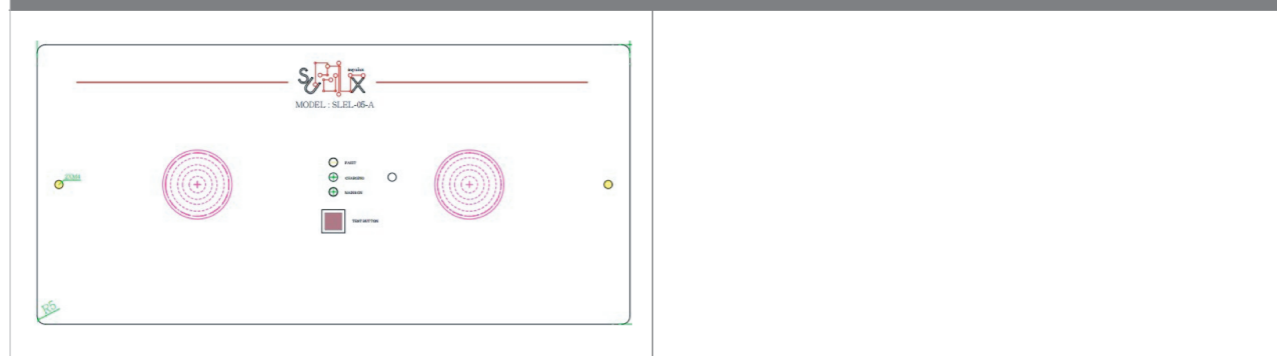

SPECIFICATION	
Model No.	SLEL-05-A
Installation Mode	Recess
Luminaries Type	Non-Maintained Type
Light Source	2 x 1W High Quality LED chips
Housing	Powder-coated Mild Steel
Input Voltage	AC 180V–242V, 50Hz
Rechargeable Battery	NiCd 3.6V 900mAh
Total Power Consumption	2W
Battery Recharge Duration	≤ 12 hours
Emergency Duration	≥ 2 Hours
Protection Rating	IP20
Insulation Class	Class one Earthing
Operation Temperature	0°C~50°C
LED Operating Life	≥ 50000 Hours
Battery Charge and Discharge Life Span	Approx. 4 year
Outside Features	"Red" "Yellow" "Green" indication light & "Test" switch
Test Button	Press type
LED "On" Indicator	"Red" LED Mains On, "Green" LED Charging, "Yellow" LED Fault
Testing Standard	HKFSD Codes of Practice for minimum service installations and equipments *FSD PPA 104(A) 4th Revision *BSEN 60598-2-22:2008, *BS 5266-1:2012

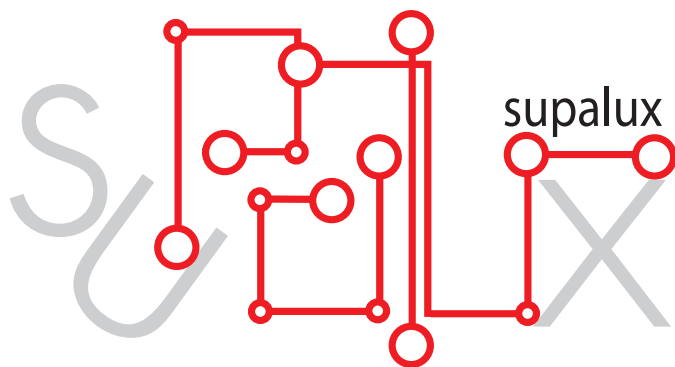

Web Site

<http://www.sl-led-application.com>

E-mail

info@sl-led-application.com

Tel

852 – 2370 9394

Fax

852 – 2743 1123

Address

Unit 202A, 20/F., Tak King Industrial Building,
27 Cheung Lee Street, Chai Wan, Hong Kong.

Editor

Au Pui Man
(openopw@gmail.com)