

Ldge - Lit LED Exit Sign




LED Exit Sign Box




Exit Sign

Legend

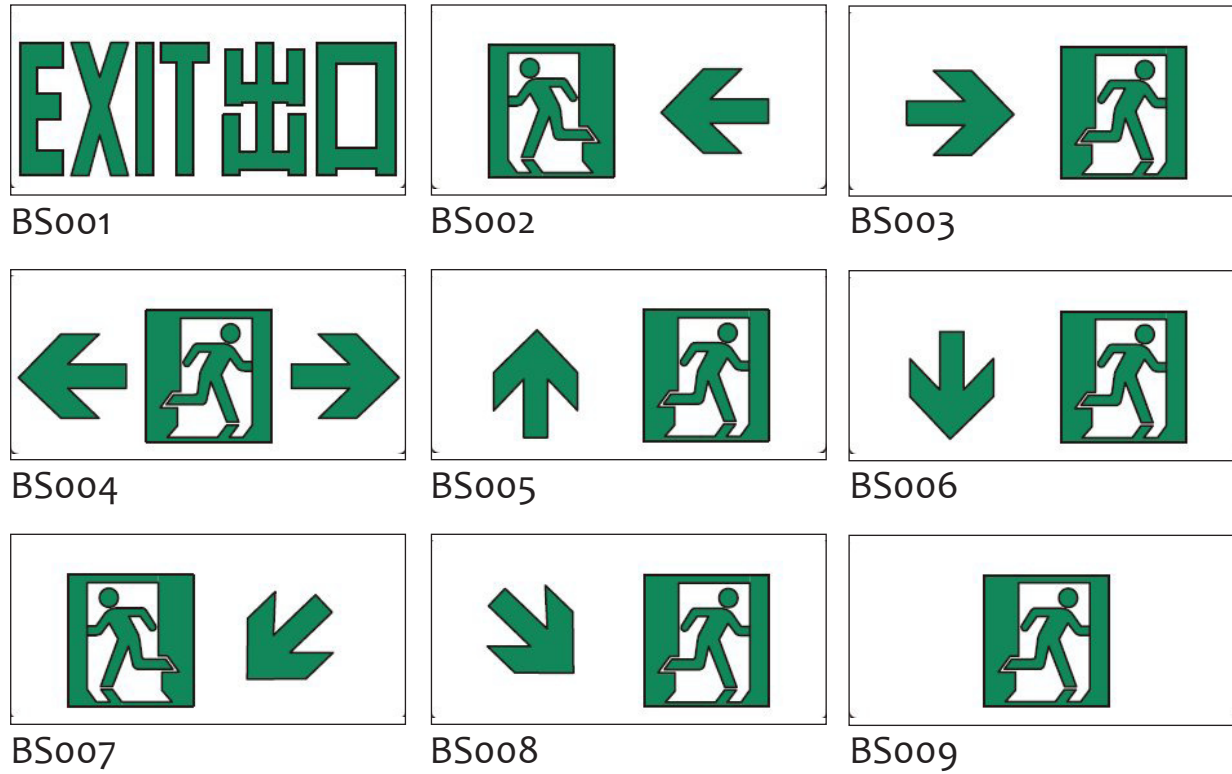

We can provide special made EXIT sign panels and other signs upon customer required.

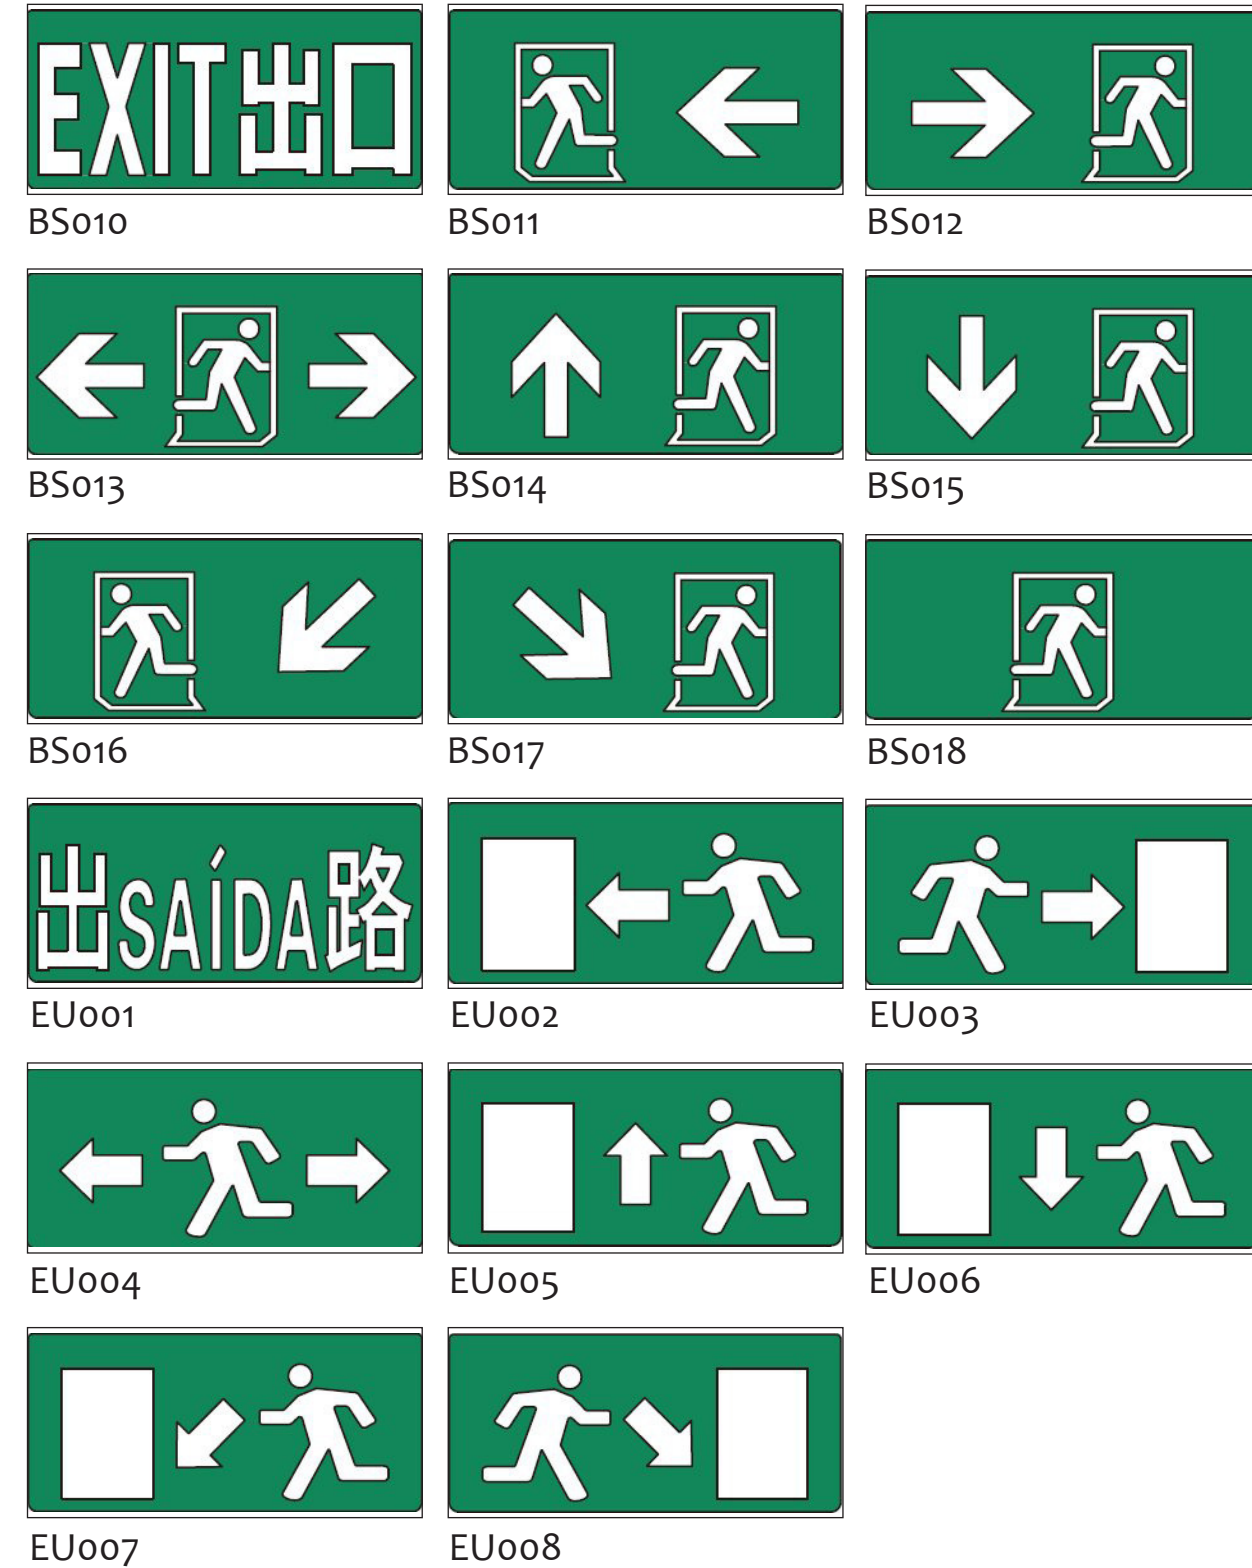



Edge Lit LED Exit Sign


Model: DS/G


SPECIFICATION

Model No.	DS/G
Installation Mode	Top / Back / Side
Words Display	Single / Double Side Luminescence
Light Source	12 pieces high intensity GREEN LEDs
Housing	Aluminum alloy materials
Input Voltage	AC 180V~242V, 50Hz
Rechargeable Battery	Ni-MH 4.8V 1800mAh
Power Consumption	Normal: 3W, Charging Stage: 4.2W
Charging Time	≤ 12 hours
Battery Power-on Time	≥3 Hours
Protection Rating	IP20
System Mode	Maintained
Operation Temperature	0°C~50°C
LED Operating Life	≥50000 Hours
Battery Charge and Discharge Life Span	Approx. 4 year
Outside Features	“Red” Charging indication light, “Yellow” Fault indication light, “Green” Charged indication light with flashing indicating self-test
Test Button	Press type
Testing Standard	HKFSD Codes of Practice for minimum service installations and equipments (April 2012) Clause 5.10 Exit Sign BS EN 60598-2-22:2008, BS 5266-1:2012, BS 5499-3:1990
Weight	Case Box:0.90kg, Plate:0.85kg, Total: 1.75kg



DIMENSION (mm) OVERALL VISIBLE PART: L404 x H248 x W44 mm

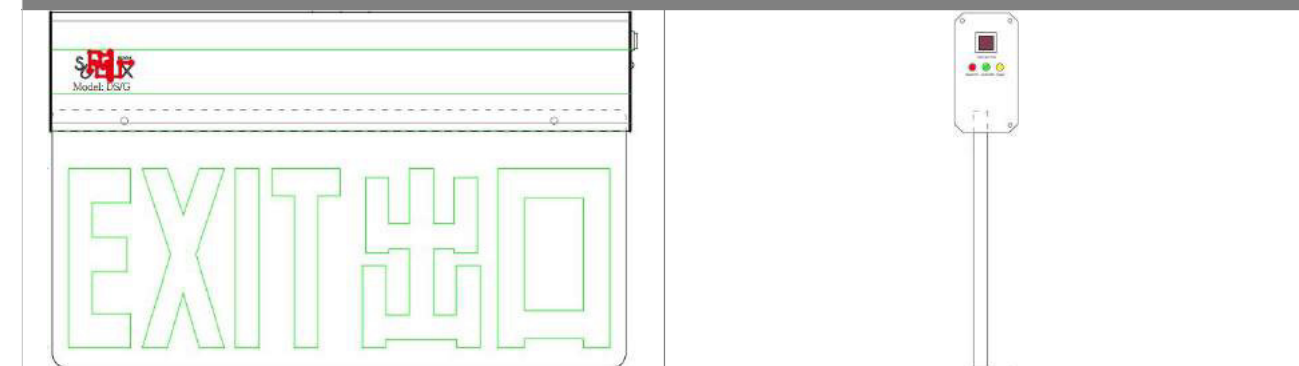

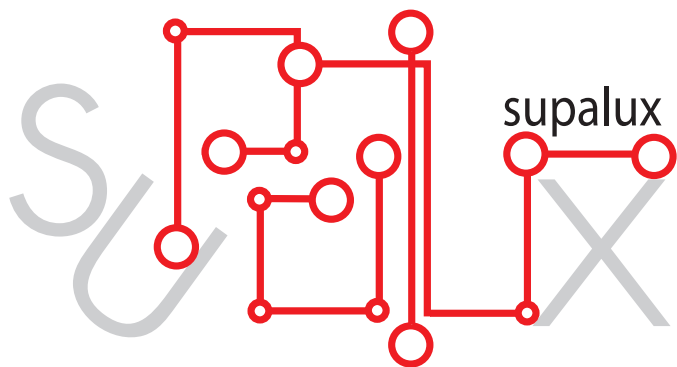**Web Site**

<http://www.sl-led-application.com>

E-mail

info@sl-led-application.com

Tel

852 – 2370 9394

Fax

852 – 2743 1123

Address

Unit 202A, 20/F., Tak King Industrial Building,
27 Cheung Lee Street, Chai Wan, Hong Kong.

Editor

Au Pui Man
(openopw@gmail.com)